


DIN 125 Flat Washer

Type A - Non Chamfered

Type B - Chamfered

DIN 125A	ISO 7089
DIN 125B	ISO 7090

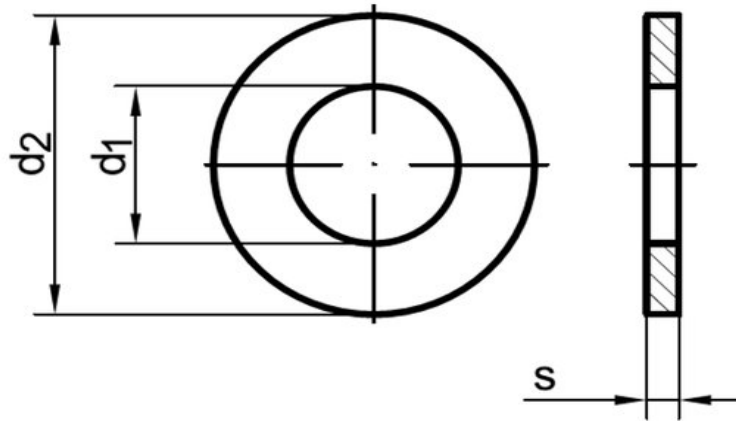

Dimensions in mm								Weight of steel product Kg/1000
d1			d2		s			
Nom	Max	Min	Max	Min	Nom	Max	Min	
1.6	1.84	1.7	4	3.7	0.3	0.35	0.25	0.024
2	2.34	2.2	5	4.7	0.3	0.35	0.25	0.037
2.5	2.84	2.7	6	5.7	0.5	0.55	0.45	0.088
3	3.38	3.2	7	6.64	0.5	0.55	0.45	0.119
3.5	3.88	3.7	8	7.64	0.5	0.55	0.45	0.155
4	4.48	4.3	9	8.64	0.8	0.9	0.7	0.308
5	5.48	5.3	10	9.64	1	1.1	0.9	0.443
6	6.62	6.4	12	11.57	1.6	1.8	1.4	1.02
8	8.62	8.4	16	15.57	1.6	1.8	1.4	1.83
10	10.77	10.5	20	19.48	2	2.2	1.8	3.57
12	13.27	13	24	23.48	2.5	2.7	2.3	6.27
14	15.27	15	28	27.48	2.5	2.7	2.3	8.62
16	17.27	17	30	29.48	3	3.3	2.7	11.3
18	19.33	19	34	33.38	3	3.3	2.7	14.7
20	21.33	21	37	36.38	3	3.3	2.7	17.2
22	23.33	23	39	38.38	3	3.3	2.7	18.3
24	25.33	25	44	43.38	4	4.3	3.7	32.3
27	28.33	28	50	49.38	4	4.3	3.7	43.7
30	31.39	31	56	55.26	4	4.3	3.7	53.6
33	34.62	34	60	58.8	5	5.6	4.4	75.3
36	37.62	37	66	64.8	5	5.6	4.4	92.1
39	42.62	42	72	70.8	6	6.6	5.4	133
42	45.62	45	78	76.8	8	9	7	183
45	48.62	48	85	83.6	8	9	7	220
48	52.74	52	92	90.6	8	9	7	294
52	56.74	56	98	96.6	8	9	7	330
56	62.74	62	105	103.6	10	11	9	425
60	66.74	66	110	108.6	10	11	9	458
64	70.74	70	115	113.6	10	11	9	492